



Top View

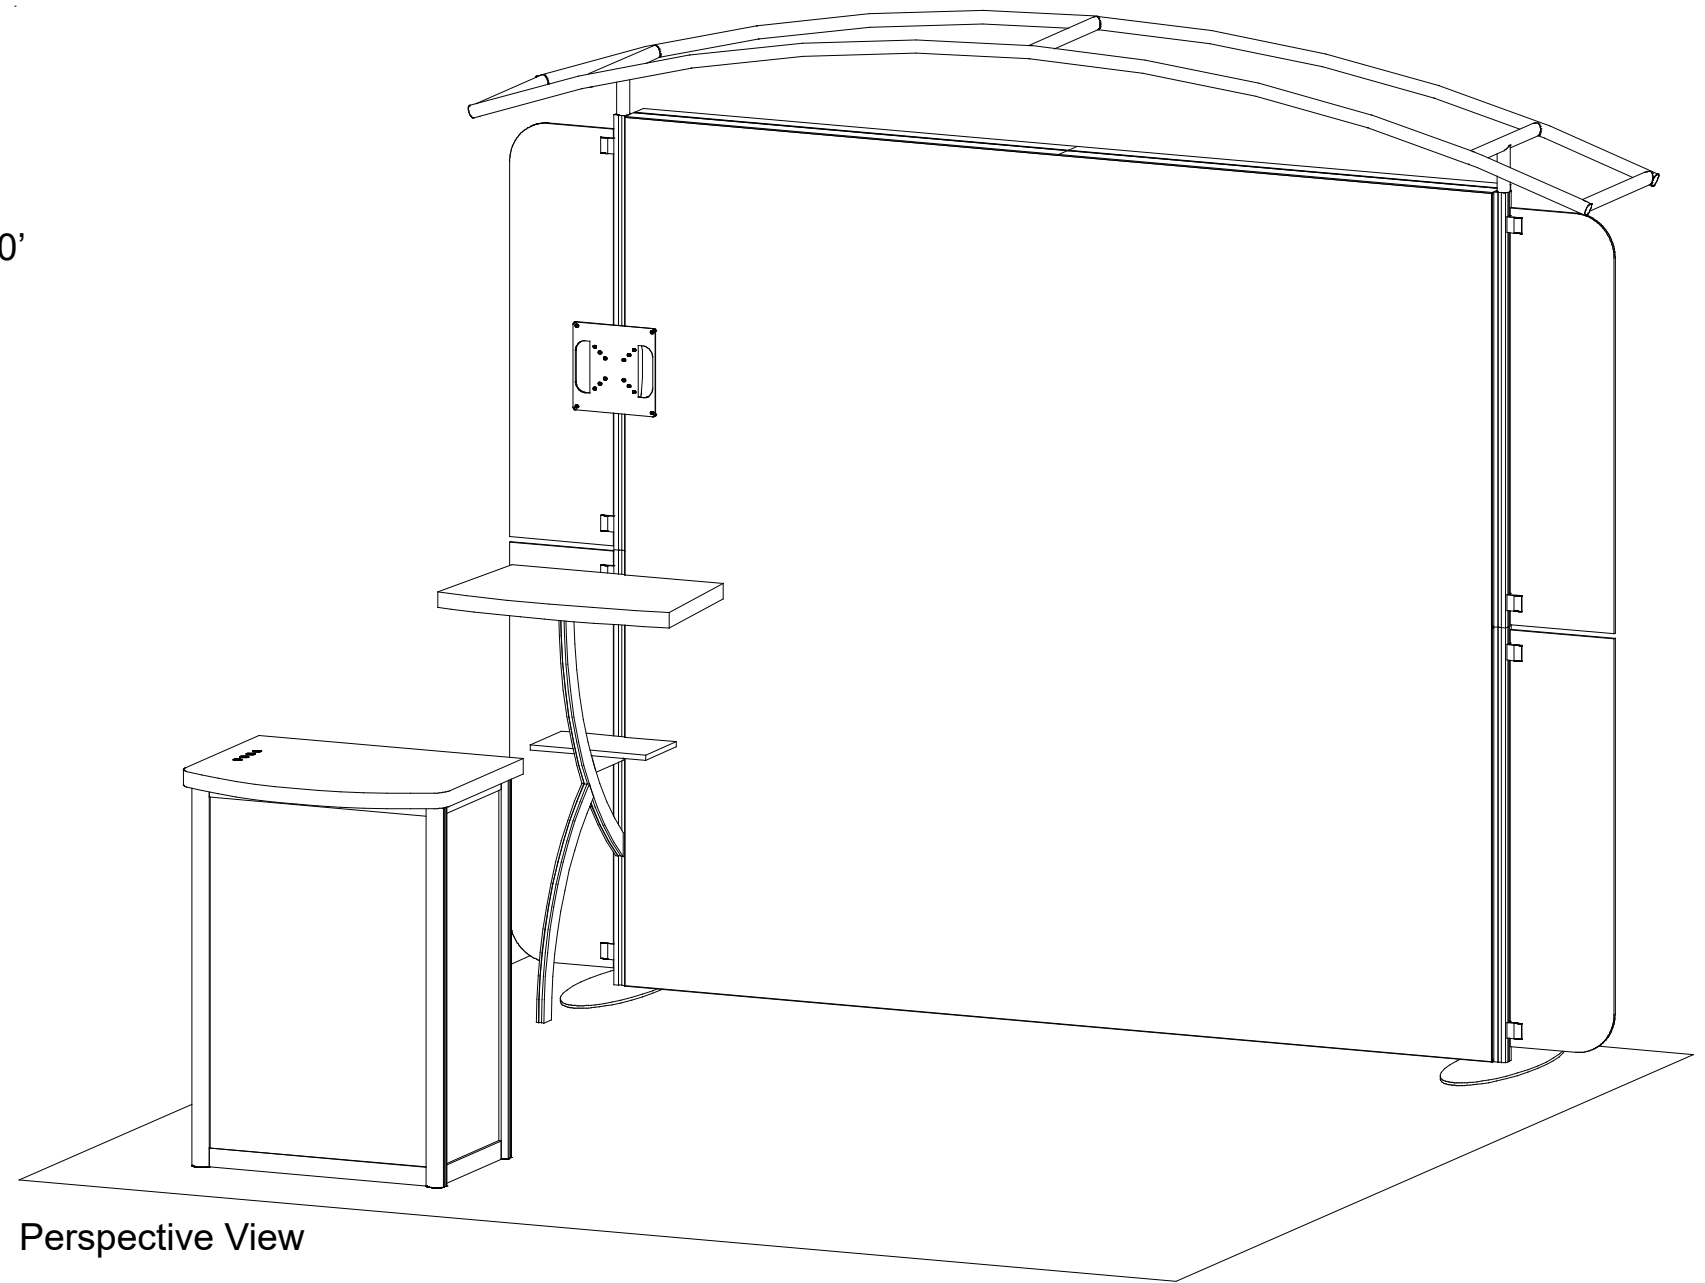

Perspective View

SETUP INSTRUCTIONS

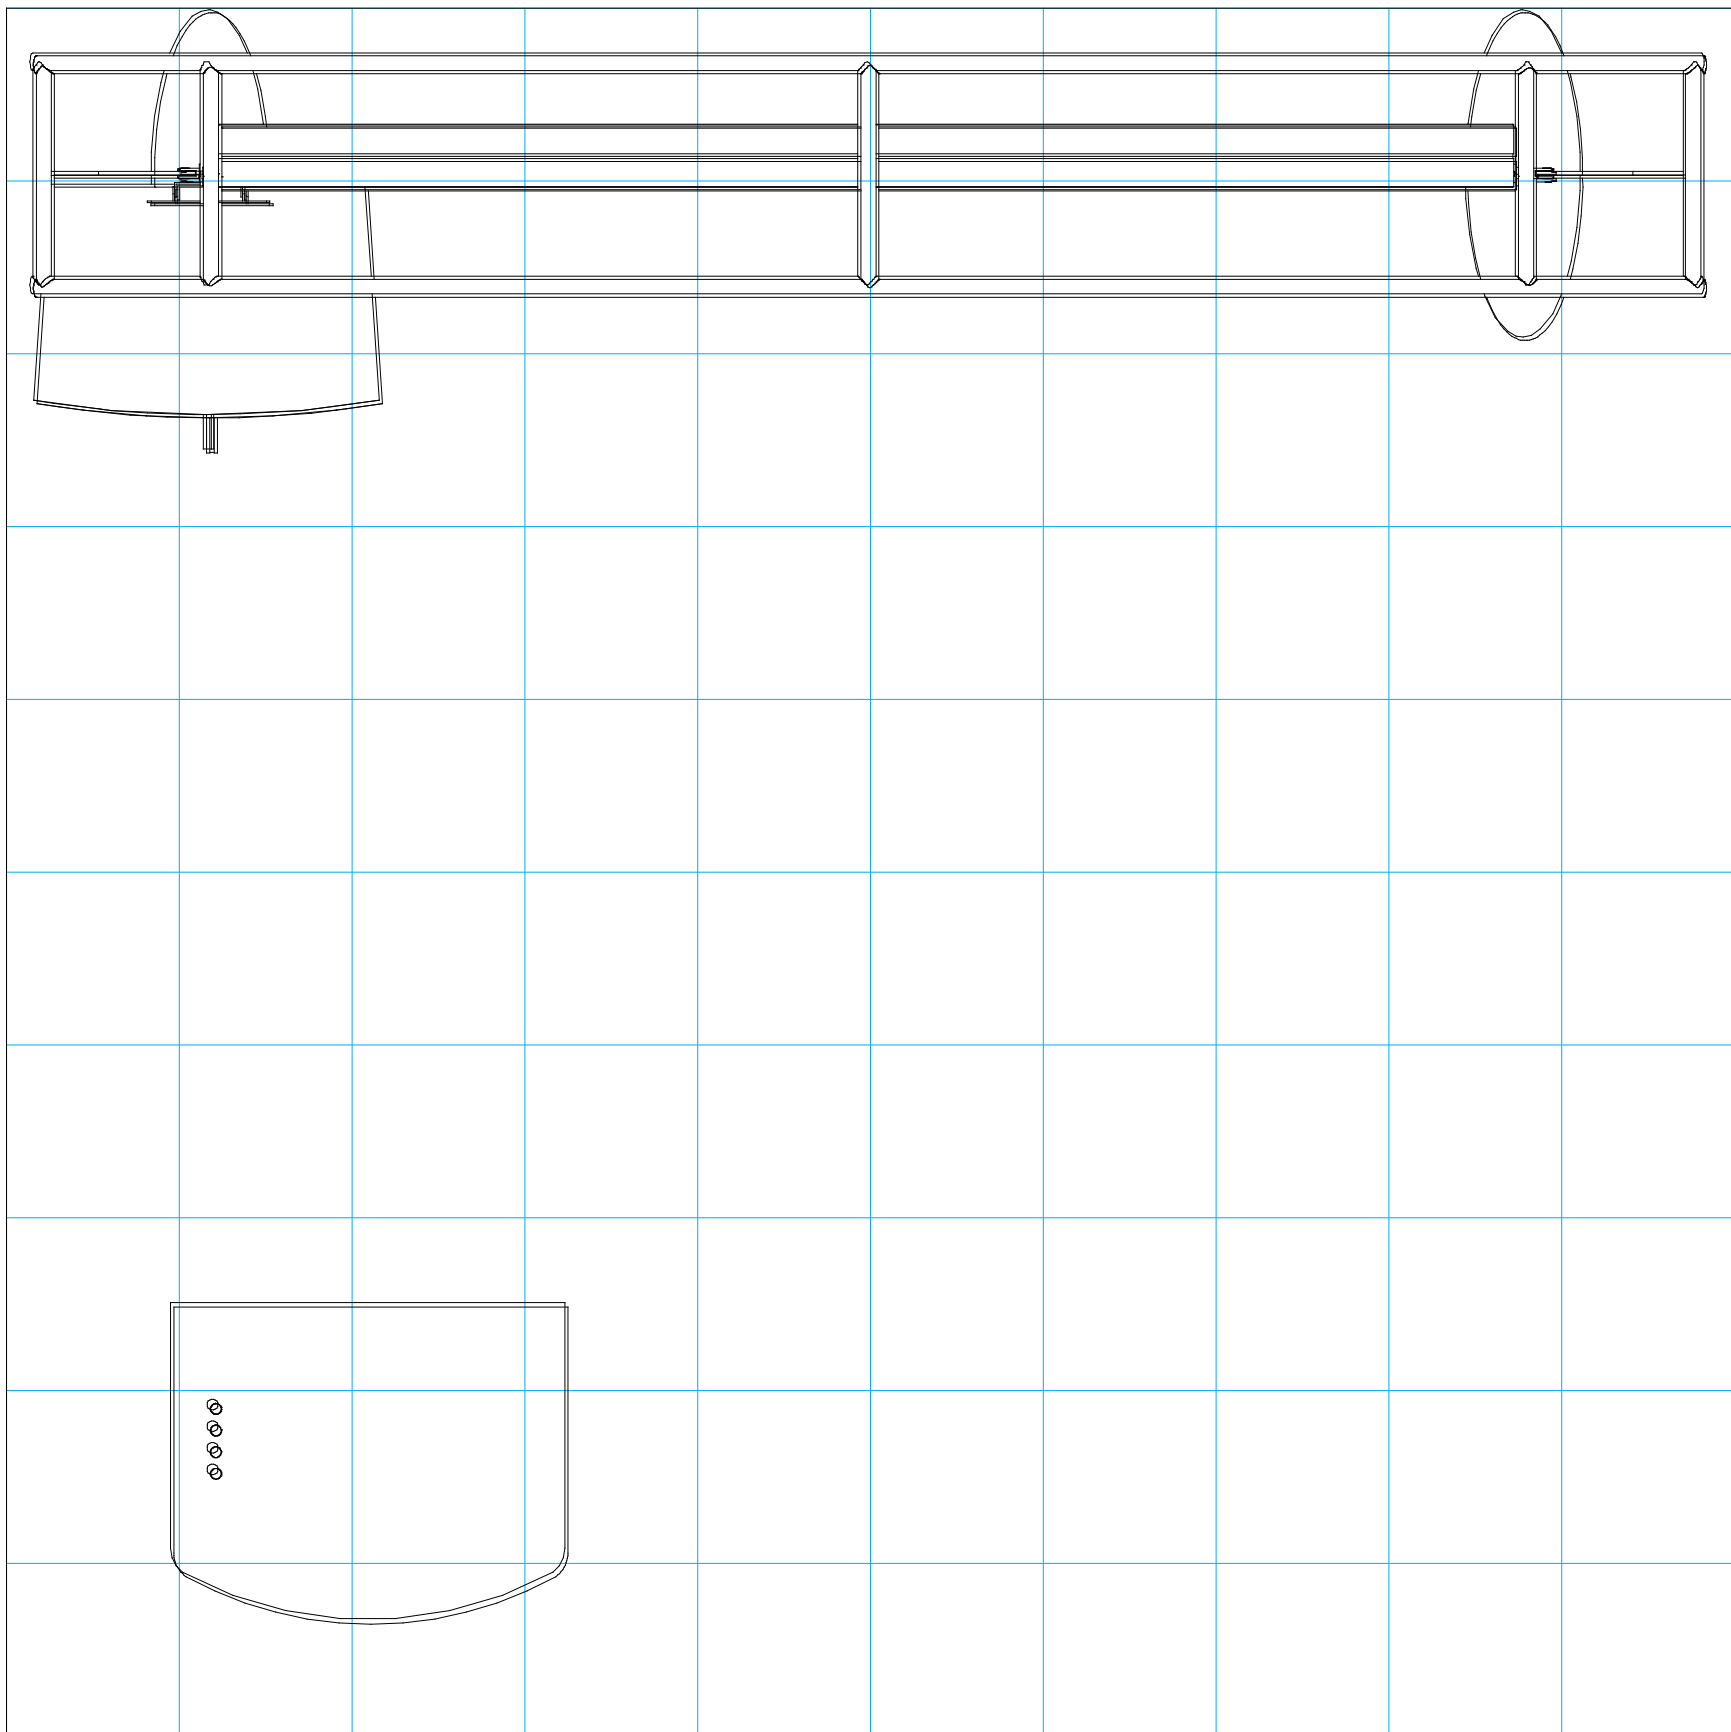

= 1 sq foot

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

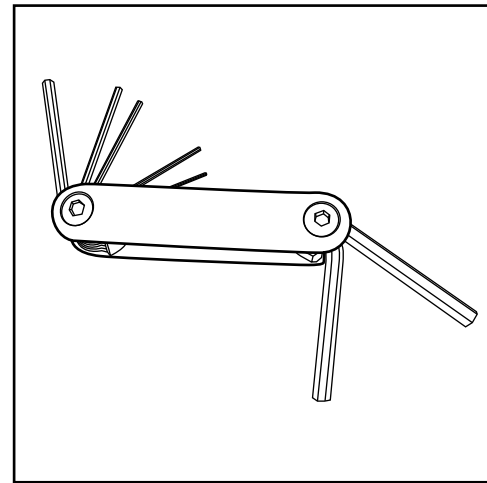


Hex Tool - Essential for Assembly

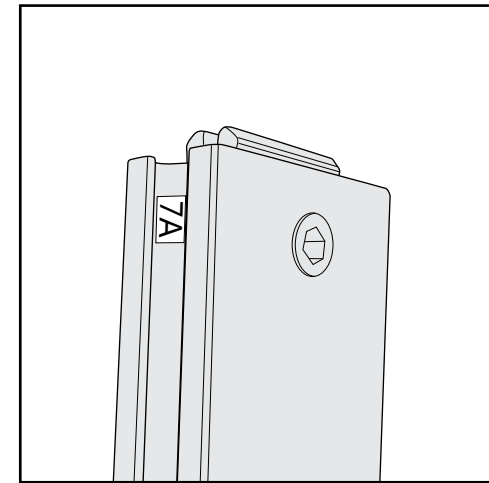


Part Identification - Numbering

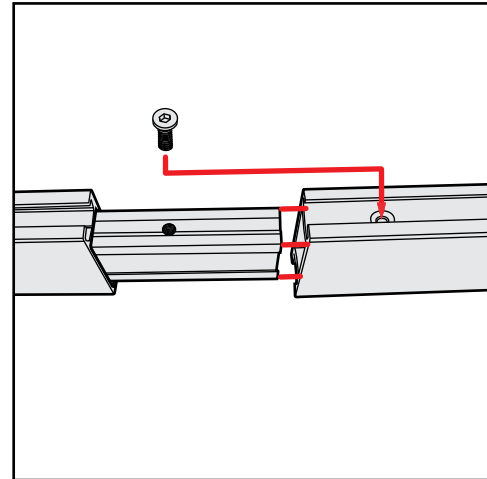


Spline Connection

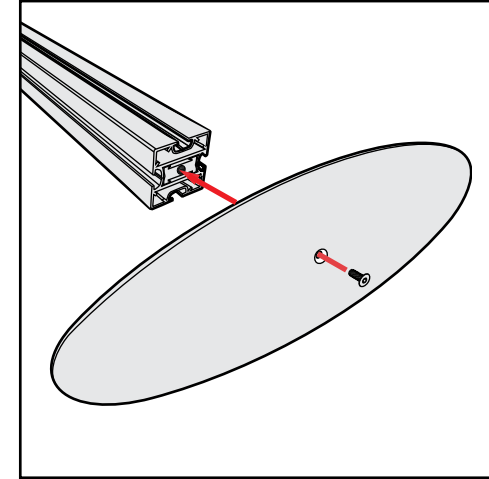

Base Plate & Extrusion Connection

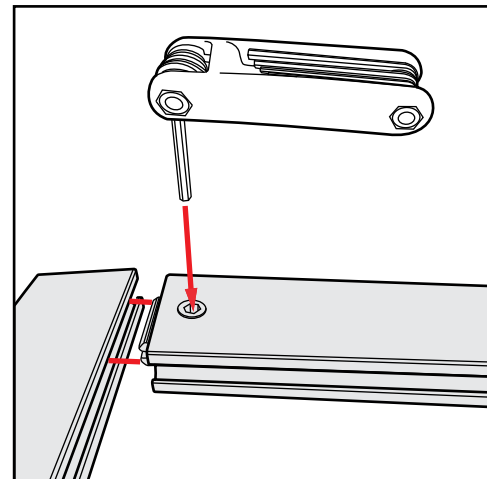

Extrusion & Lock Connection

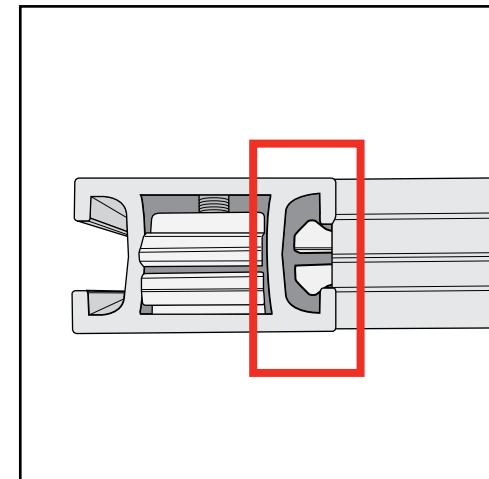


Engaged Lock



WARNING



DO NOT USE POWER TOOLS




LADDERS OR LIFTS
MAY BE REQUIRED




ALL CONNECTIONS MUST
BE TIGHTLY SECURED




1) Mounting plate & wing nuts, in packed position.

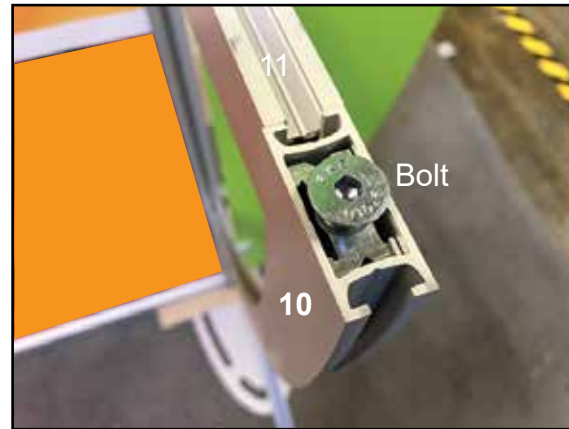


2) Mounting plate bolt in, packed position.

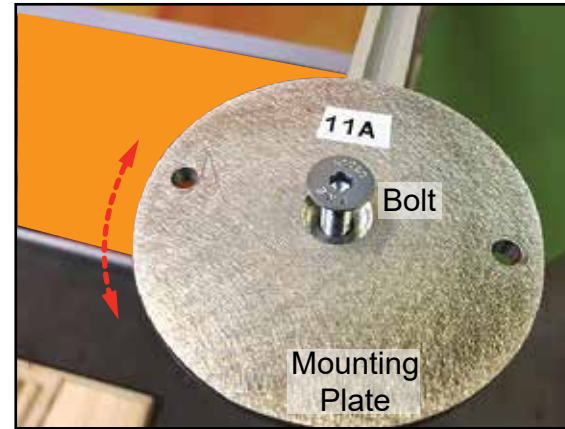


3) Place mounting plate onto [10] then tighten bolt, part way, allowing some rotation for final positioning.

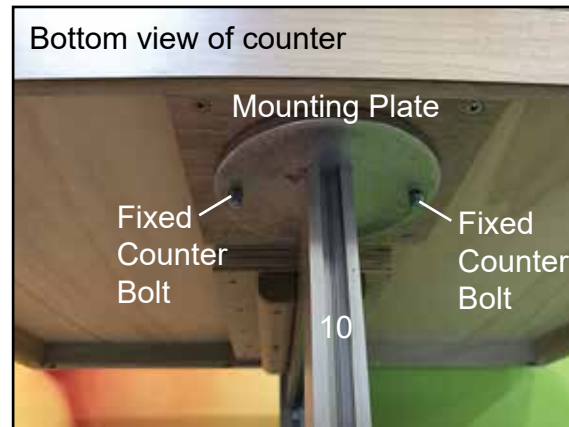

4) Place fixed counter bolts into mounting plate, then lift counter to re-tighten bolt.

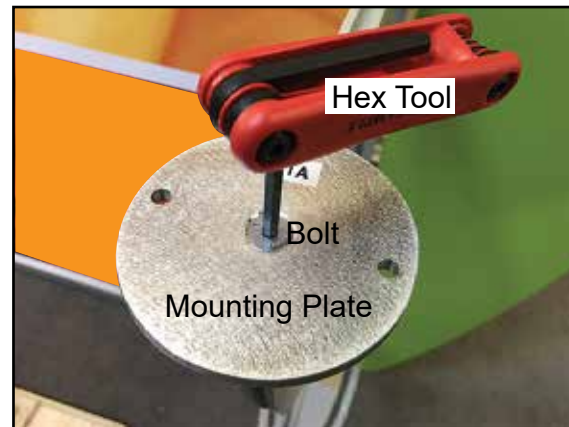


5) Tighten bolt, using hex tool, to secure.

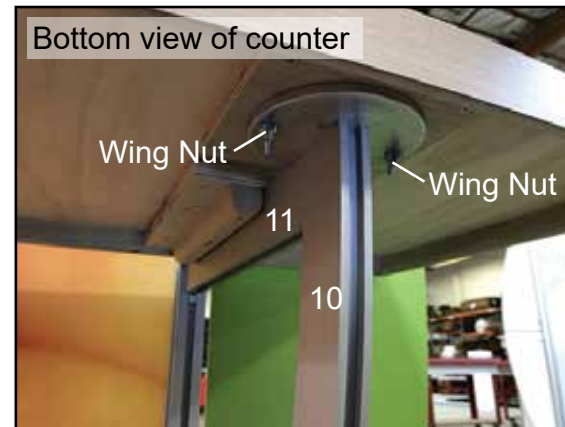

6) Place fixed counter bolts into mounting plate, then secure using wing nuts.

Completed Assembly

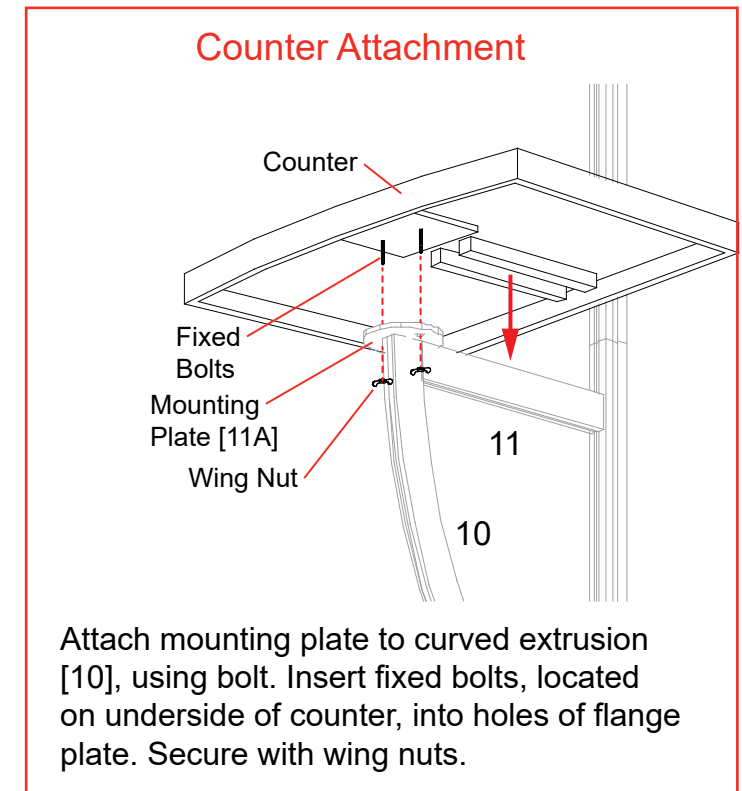



Keep mounting plate [11A] and wing nuts attached to counter, when packing.

Keep bolt attached to [10], when packing.

Straight Connection

When assembling frame, first attach all **straight connectors**, then attach **corner connectors**.

- 1) Place extrusions end-to-end.
- 2) Loosen all knobs, then slide **straight connectors** across the seam of extrusions.
- 3) Tighten all knobs to secure connection.

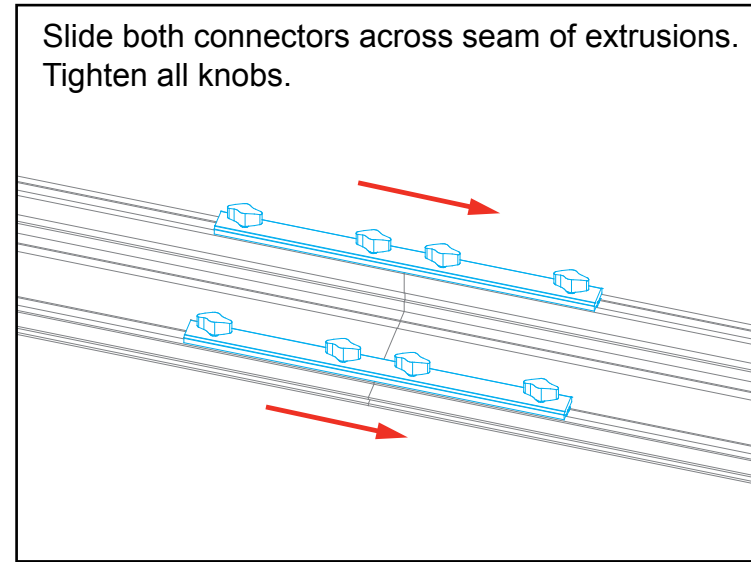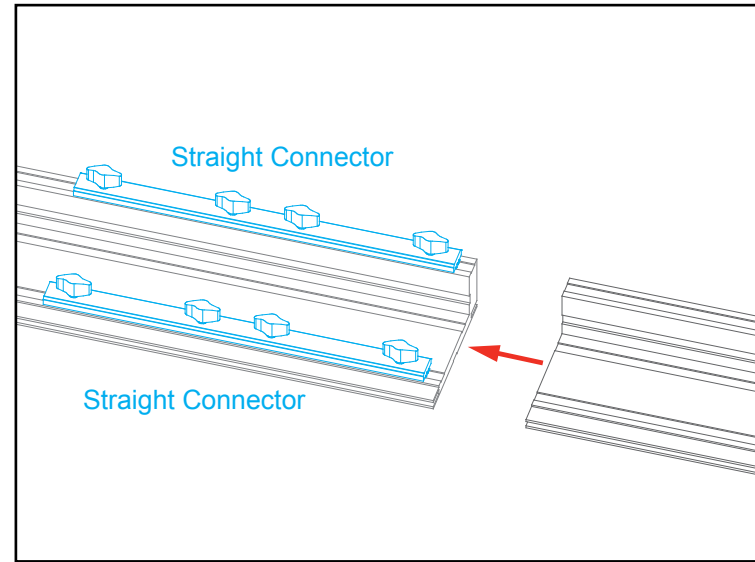

All knobs must be tightened securely to ensure a proper connection.

Disassembly

- 1) Loosen all knobs.
- 2) Slide connectors off of one extrusion.
- 3) Tighten knobs to prevent loss during packing & shipping.


Keep straight connectors in groove of extrusion. Do not remove connectors during disassembly.

Corner Connection


- 1) Loosen knobs, then slide vertical extrusions onto **corner connectors** of **lower** horizontal extrusion.
- 2) Slide **corner connectors** of **upper** horizontal extrusion into grooves of vertical extrusions.
- 3) Tighten all knobs to secure connection.

Disassembly

- 1) Loosen knobs on vertical extrusions.
- 2) Slide the vertical extrusions off of **corner connectors** on lower and upper horizontal extrusions.

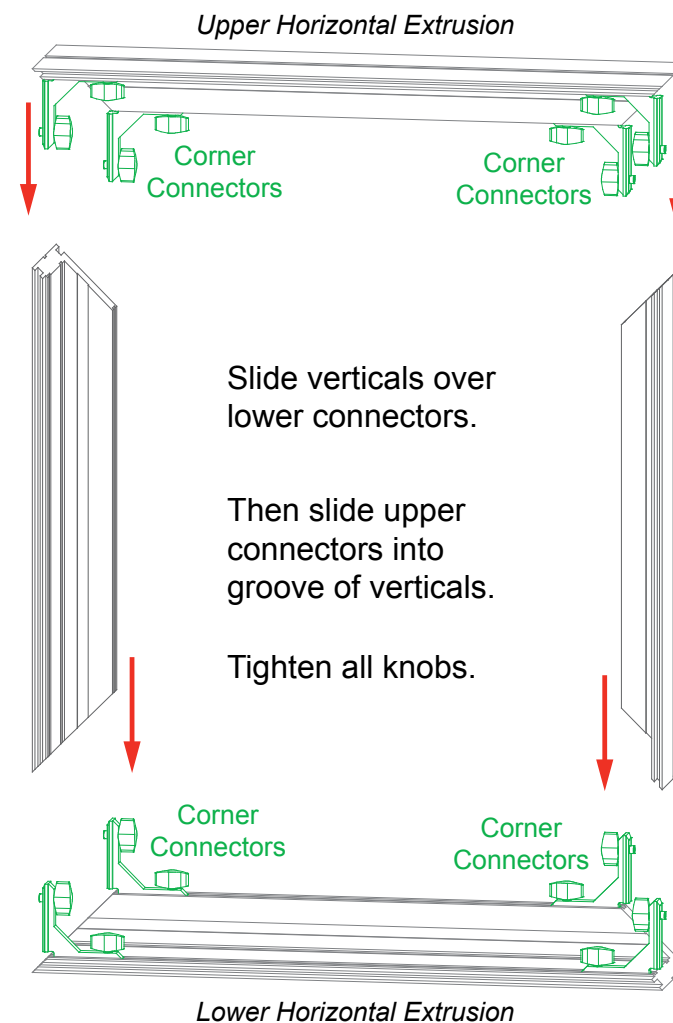


Adjust connectors if necessary to prevent gaps in connection.

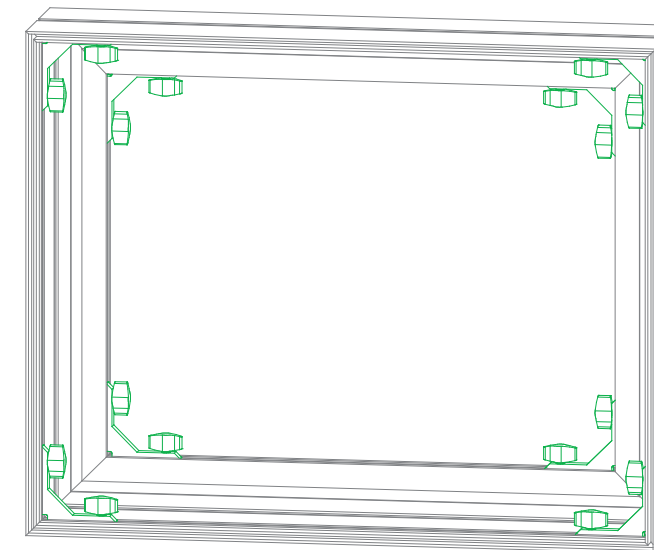

COMPLETED ASSEMBLY

All knobs must be tightened securely to ensure a proper connection.

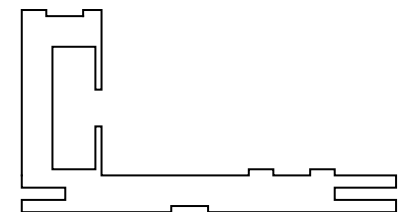


CEI110 Profile


SEG Graphic Installation *in 3 Steps*

The Perfect Fit


STEP 1: Attach Corners

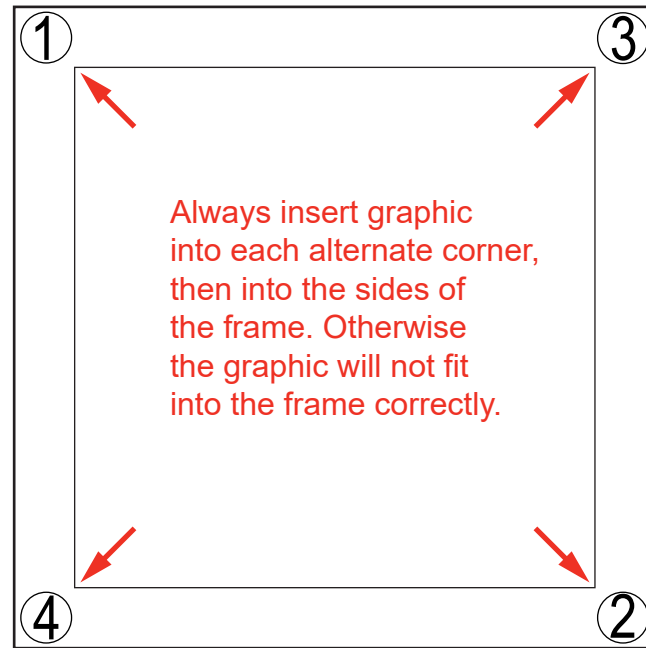

STEP 2: Attach Middle

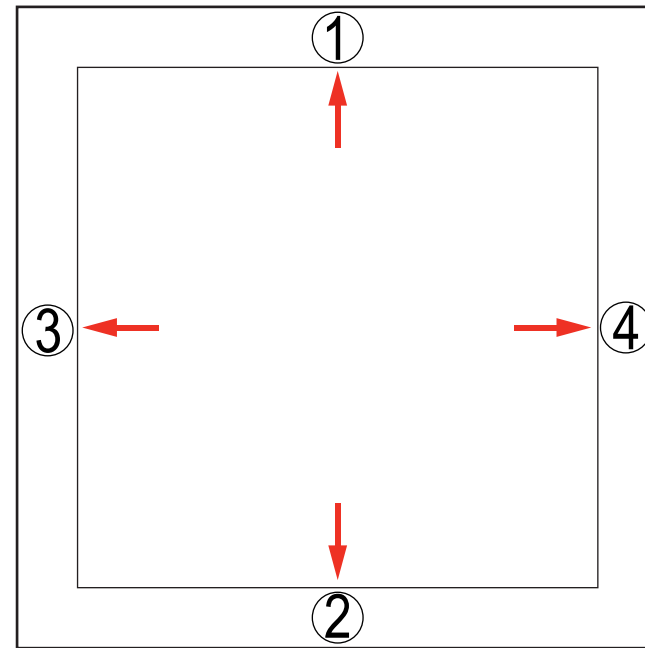

STEP 3: Attach Sides

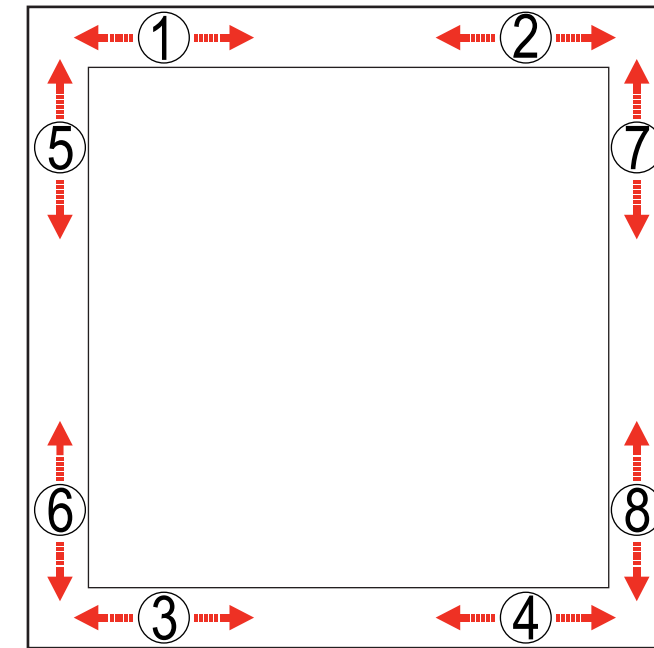

Insert narrow side of silicone welt into the channel at corner 1, with fabric to the outside.

Repeat for opposite corner 2, then corner 3, then corner 4.

Once corners are attached, press the middle of edge 1 into the channel. Then press middle of edge 2 into the channel on opposite side.

Repeat with edge 3 & 4.

Once the middle of sides are attached, fully press the silicone welt into the channel, between center and corner at location 1. Repeat the process between center and corner at location 2.

Do the same for welt on opposite side, at locations 3 & 4. Then repeat for locations 5 & 6 and 7 & 8.

Once the welt is fully inserted on all sides, smooth out edges as needed for a perfect fit.




To remove the graphic from the frame, locate the fabric **pull tab**. Gently pull on the tab to remove the graphic.

Install video:



| Item | Qty. | Description |
|------|------|--|
| 1,1A | 1,1 | 42" h CEI110 Vertical Extrusion |
| 2,2A | 1,1 | 42" h CEI110 Vertical Extrusion |
| 3,3A | 1,1 | 45" h CEI110 Horizontal Extrusion |
| 4,4A | 1,1 | 45" h CEI110 Horizontal Extrusion |
| 5,5A | 1,1 | 40.1767" h Z45 Vertical Extrusion |
| 6,6A | 1,1 | 42" w S40 Vertical Extrusion |
| 7,7A | 1,1 | 42" h S40 Vertical Extrusion w/ Canopy Mount |
| 11 | 2 | Base Plate |







- Steps:
- 1) Assemble extrusions [1] thru [4A], flat on floor, as shown.
See CEI110 Frame Assembly sheet.
 - 2) Connect extrusions [5] to [5A]. See **Z45 Connection** detail.
 - 3) Attach assembly [5/5A] into center of assembled frame. See **Z45 Attachment** detail.
 - 4) Connect verticals [6 to 7] and [6A to 7A] then attach to each side of assembled frame.
See **Extrusion Connector** and **V4 Connector (Top View)** details.
 - 5) Connect lighting power cords and attach transformers. See **Light Connection** details.
 - 6) Attach base plates [11] to verticals [6] and [6A], using bolts, than lift frame upright.
 - 7) Install SEG graphic to front and blocker fabric to back of assembled CEI110 frame.
See SEG Graphic Installation sheet for instruction.

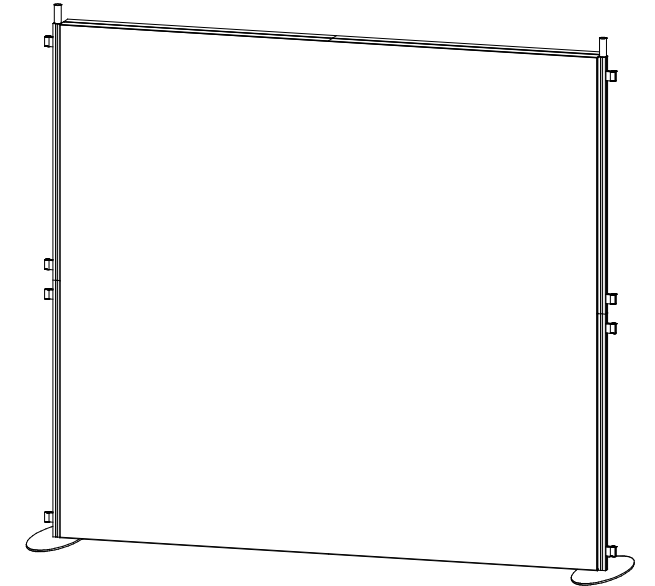

Completed Backwall Assembly

Keep canopy mounts attached to [7] and [7A], when packing.

Keep clamps attached to [6] [7] [6A] and [7A], when packing.

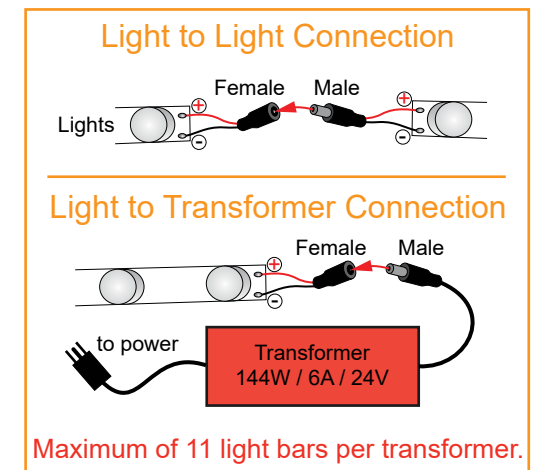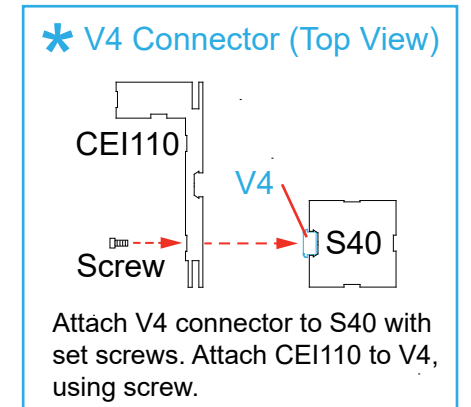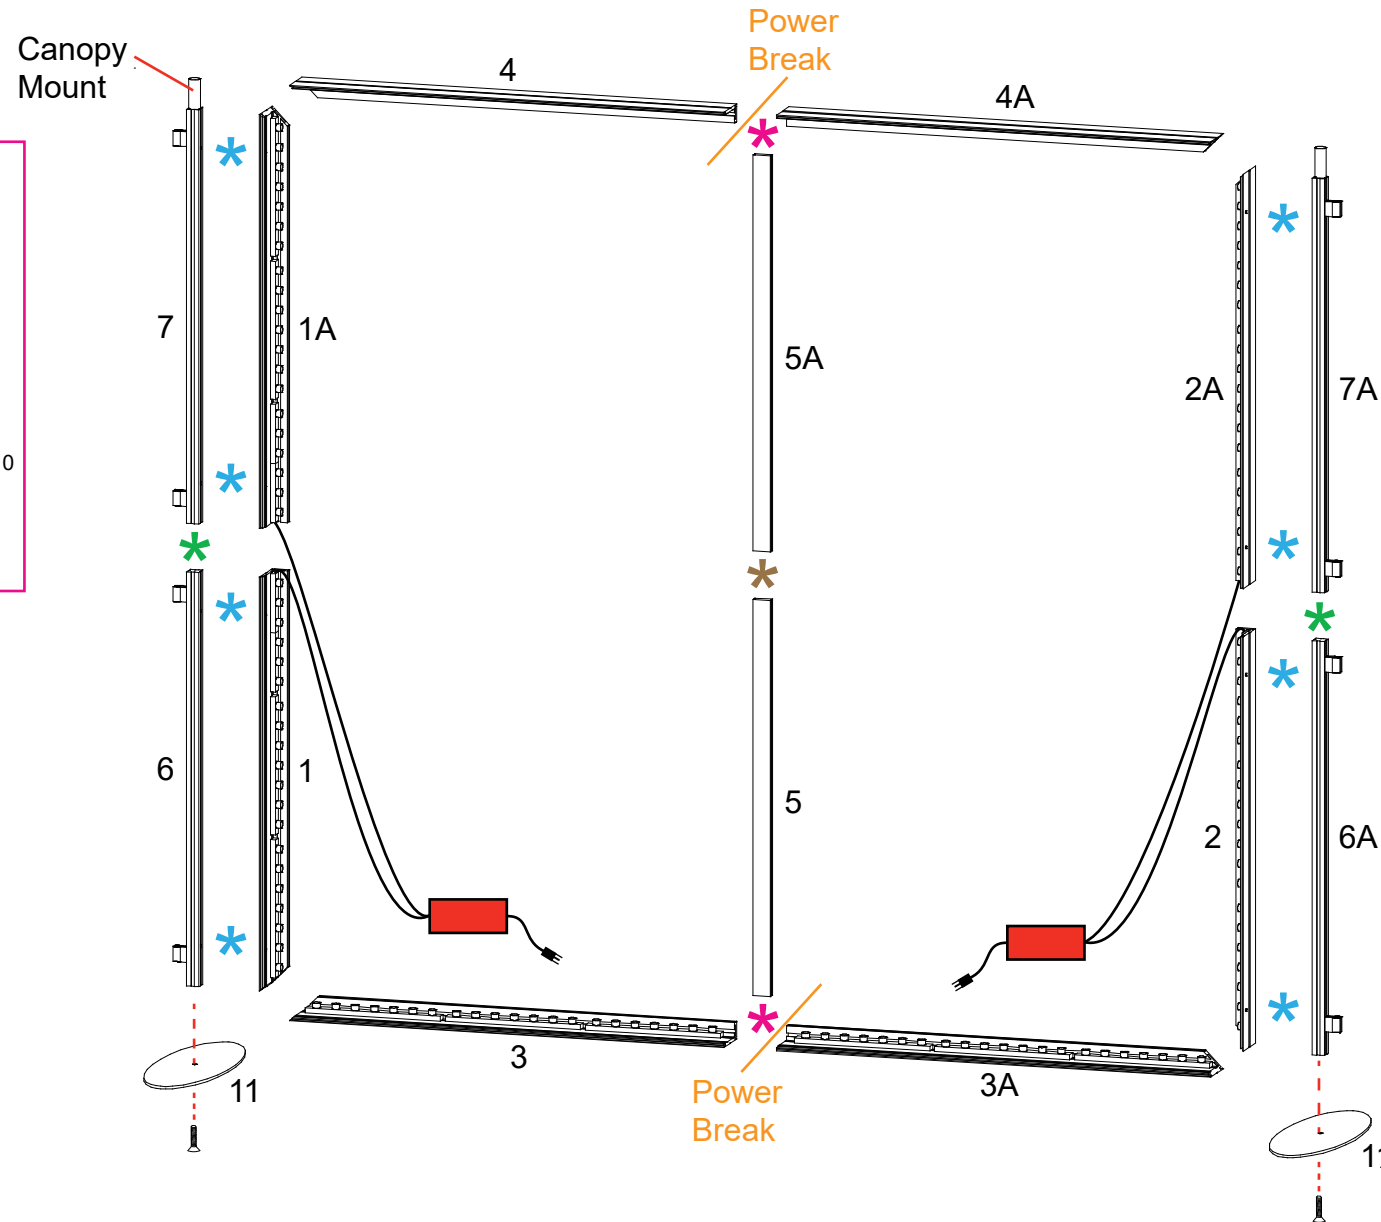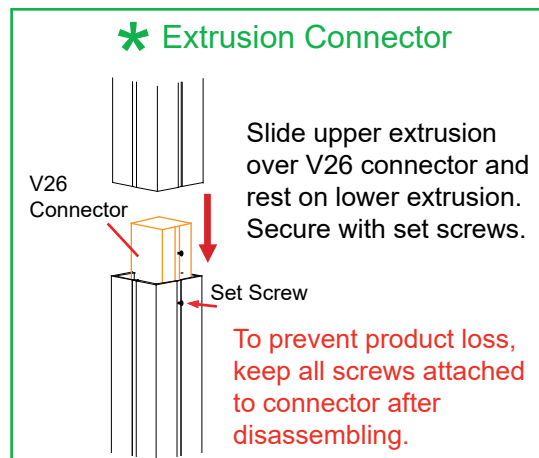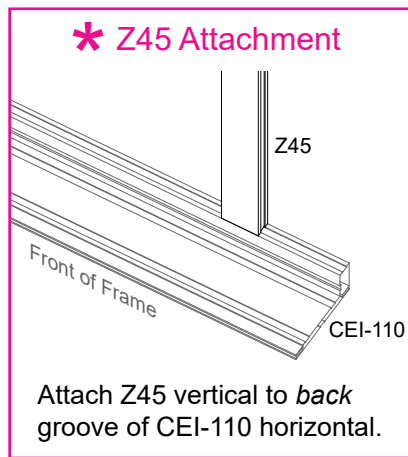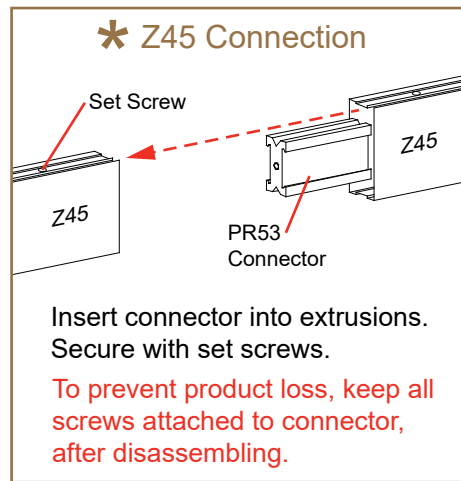

AERO


Using Your Setup Instructions

The Aero Setup Instructions are created specifically for your configuration. The instructions include an exploded view of the frame which is sequentially labeled. We encourage you to review the instructions before attempting to assemble your exhibit.


Connections are kept very simple; no tools required. Everything assembles with push-button connectors.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.


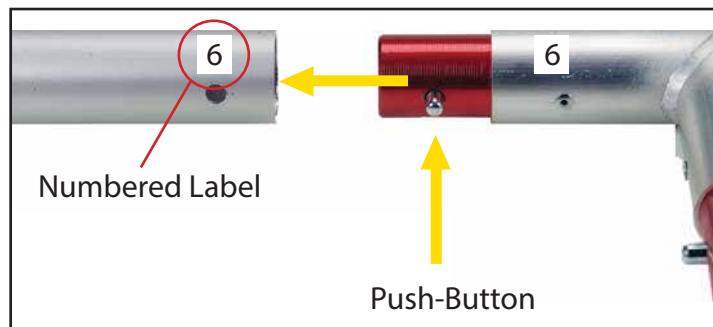


Connections are made by holding the button down and sliding the red tube into opposing tube until button locks into the hole of the opposing tube. To disassemble, push button and pull or twist extrusions apart.

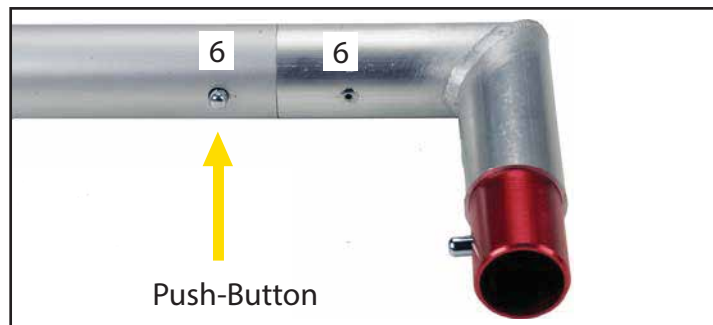

Steps:


- 1) Connect canopy pieces together as shown.
- 2) Apply pillowcase graphic to assembled canopy

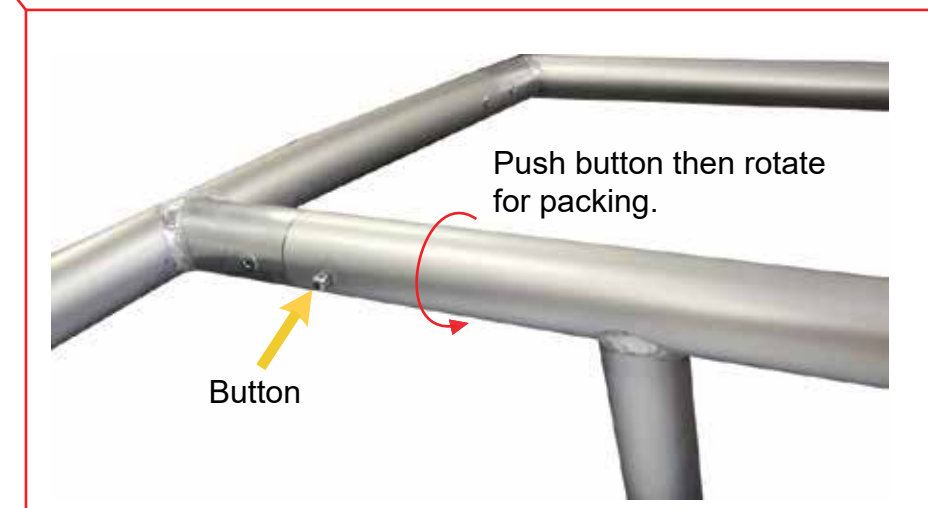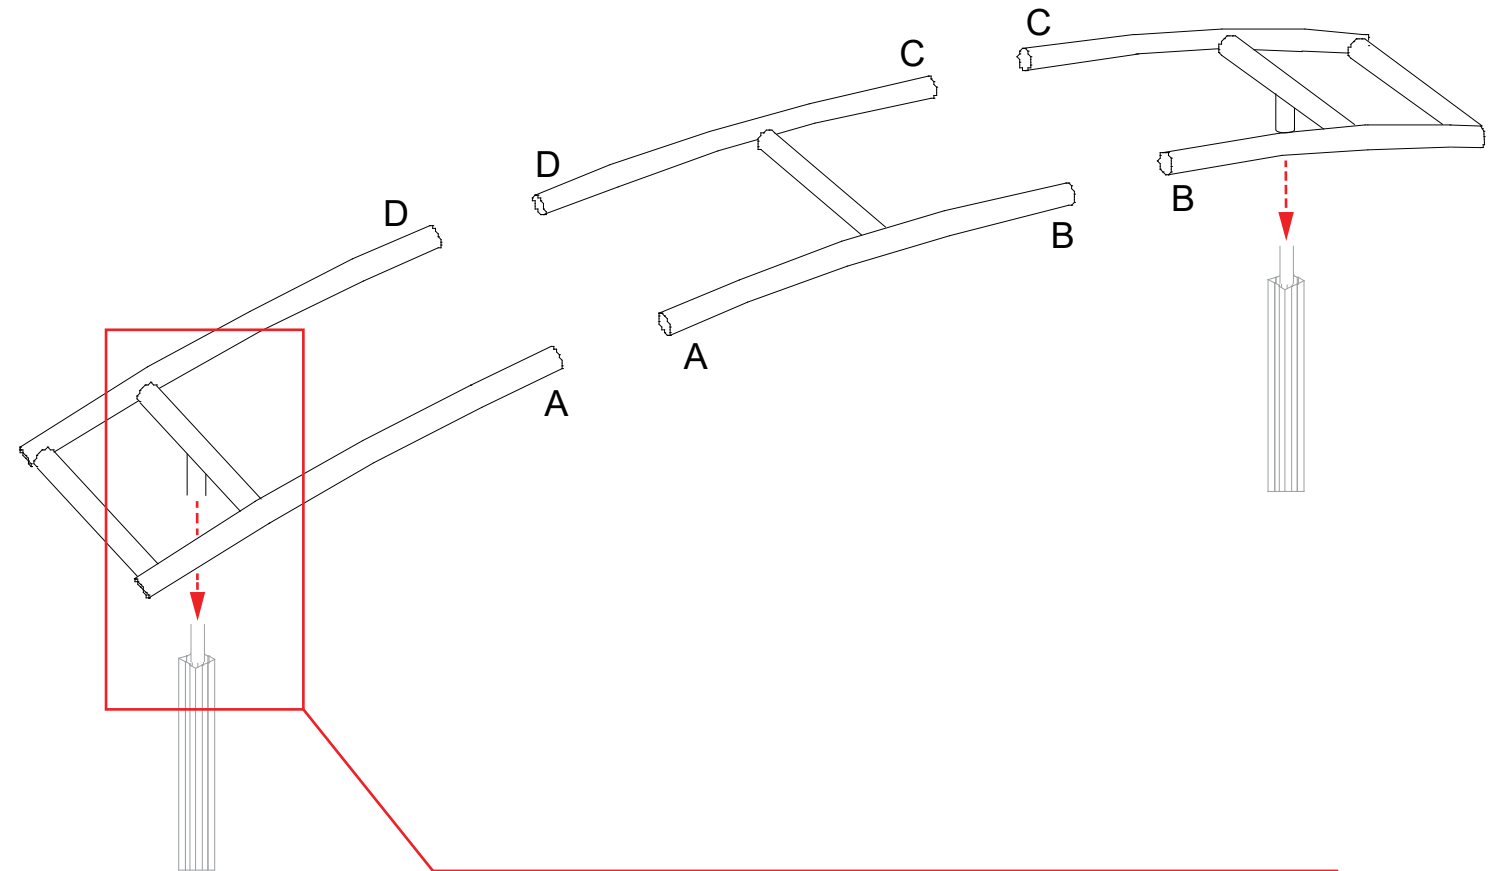




| Item | Qty. | Description |
|------|------|----------------------------------|
| 12 | 1 | 12.184" Z45 Horizontal Extrusion |
| 13 | 1 | 30.2" Z45 Curved Extrusion |
| 14 | 1 | 24.45" Z45 Support Leg |
| 15 | 1 | Mounting Plate |

- Steps:
- 1) Connect assembled extrusions [12/13] and shelf to vertical [6].
 - 2) Connect support leg [14] to curved extrusion [13].
 - 3) Attach counter to mounting plate [15]. See Counter Attachment sheet.
 - 4) Attach counters to mounting plate [15]. See Counter Attachment sheet.
 - 5) Route USB cords from counter. See USB Cord Management sheet.
 - 6) Attach wings to clamps. See [A10 Clamp](#) detail.
 - 7) Place assembled canopy onto mounts at top of assembled Backwall.
 - 8) Attach monitor mount to vertical [7]. See [Monitor Mount Attachment](#) detail.

Keep extrusions [12] and [13] assembled, when packing.

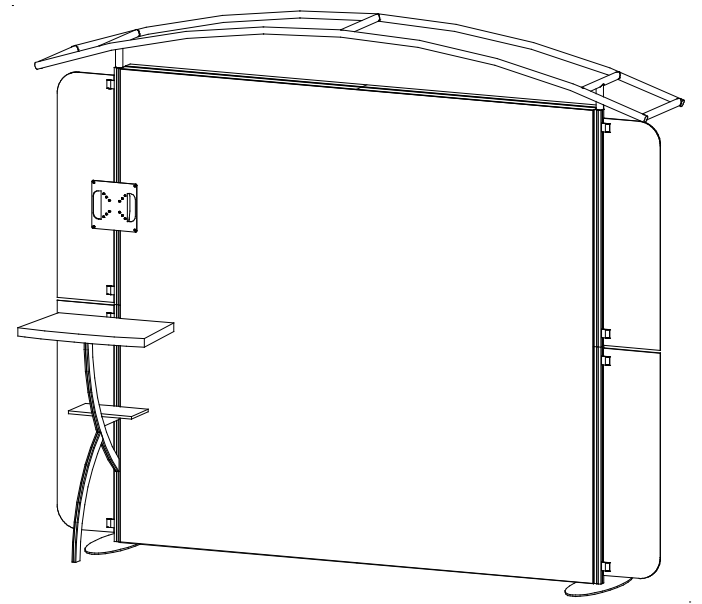


Completed Assembly

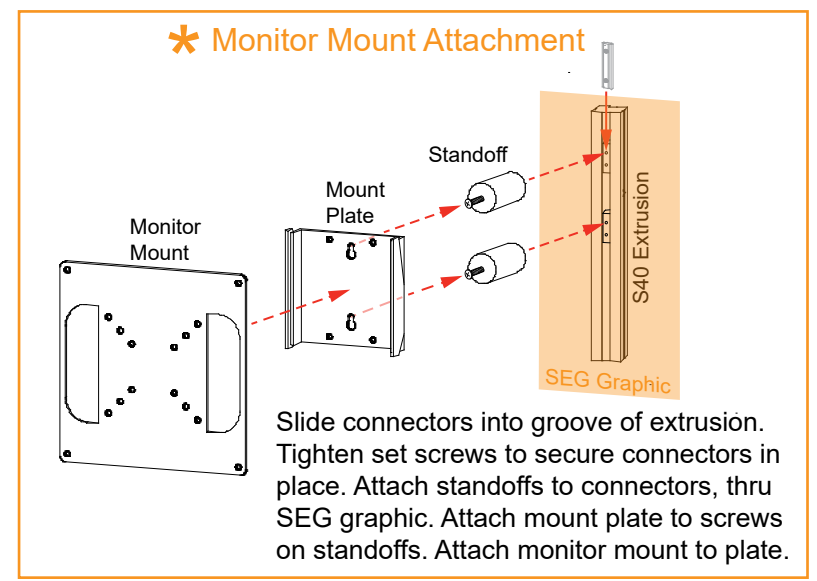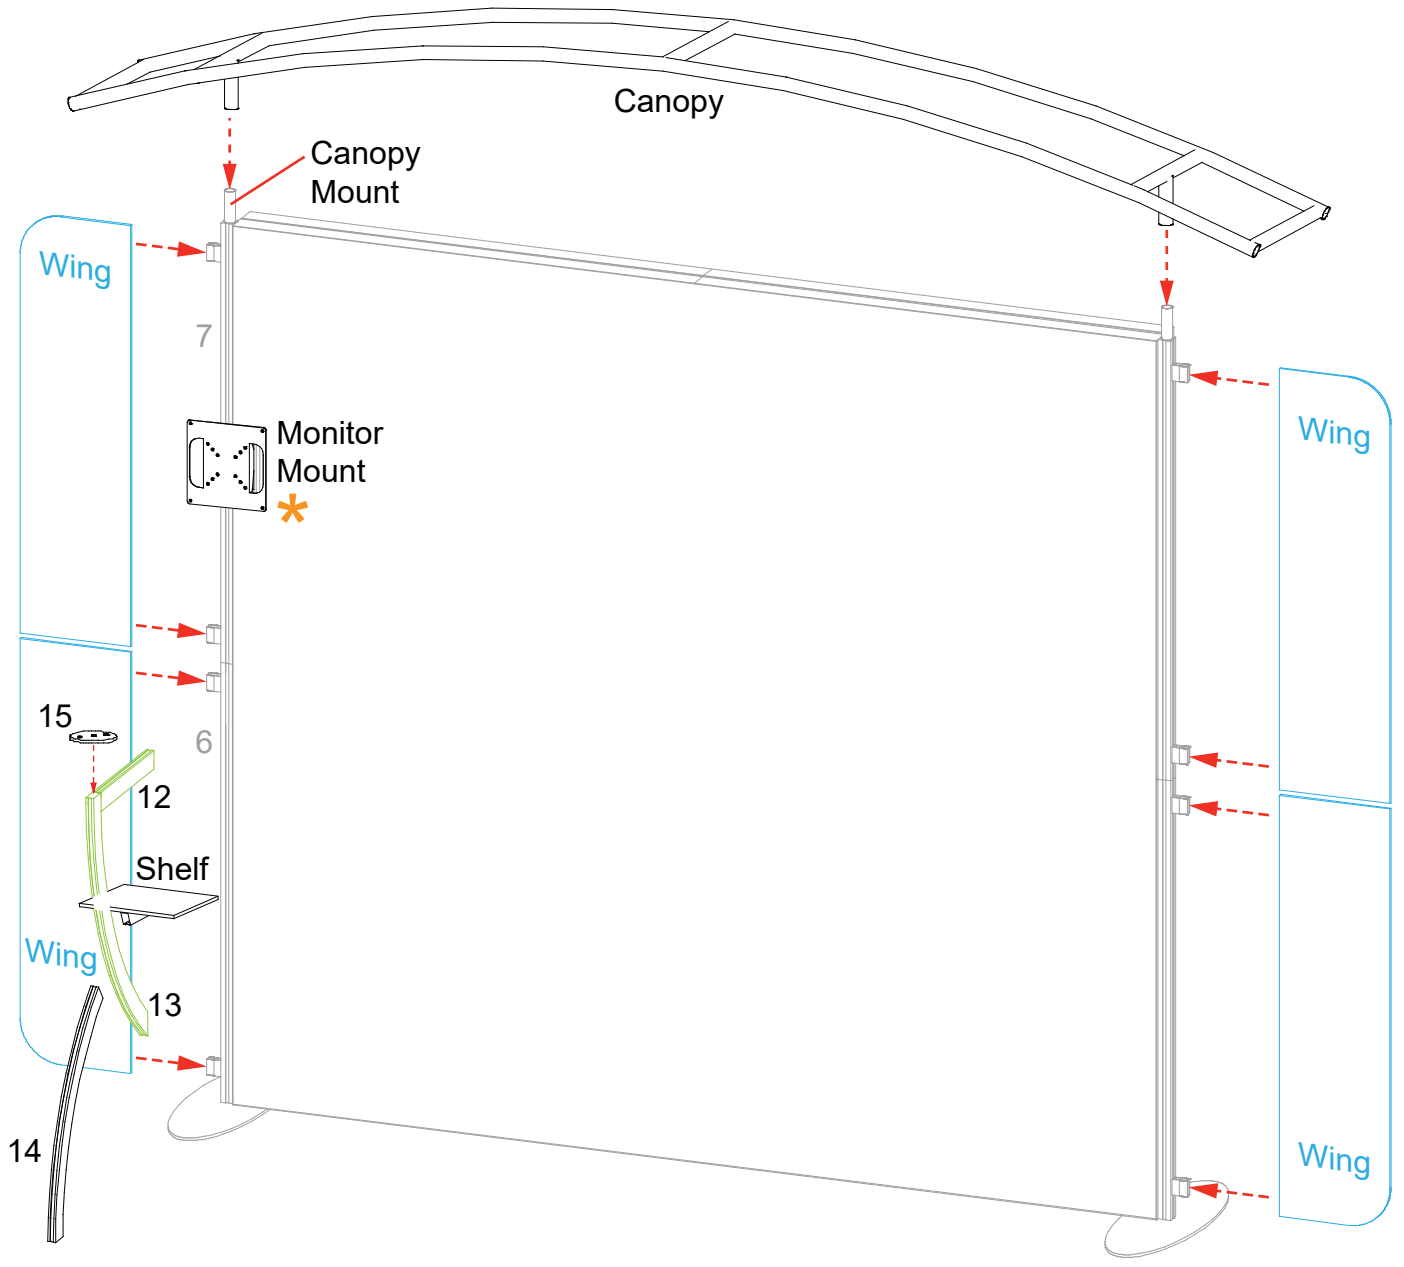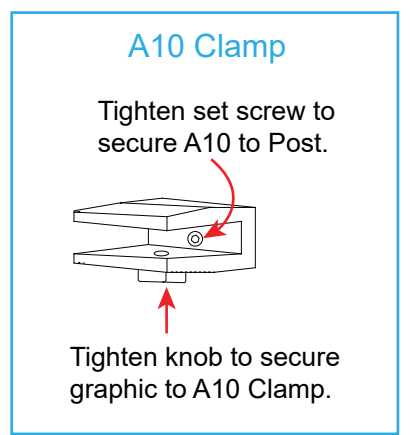






| Item | Qty. | Description |
|------------|-------|--|
| 16 | 1 | 37.5" RSG530 Vertical Extrusion w/ Door Hinges |
| 17 | 1 | 37.5" RSG530 Vertical Extrusion |
| 18 | 1 | 37.5" RSG530 Vertical Extrusion |
| 19 | 1 | 37.5" RSG530 Vertical Extrusion w/ Door Stop |
| 20,20A | 2,2 | 22.5" Z45 Horizontal Extrusion |
| 21,21A,21B | 2,1,1 | 13.25" Z45 Horizontal Extrusion |

Steps:

- 1) Attach lower horizontals [20] and [21] between verticals [16] [17] [18] and [19].
- 2) Connect door to vertical [19]. See **Door Connection** detail.
- 3) Slide **infills** between verticals [16,17] [17,18] and [18,19], making sure Velcro faces inward.
- 4) Attach upper horizontals [20A] [21A] and [21B] between verticals [16] [17] [18] and [19], on top of **infills**.
- 5) Connect shelf supports to Velcro on **infills** then set shelf on top of supports.
- 6) Lock counter top to horizontals [21A] and [21B]. See **Counter Top Lock** detail.

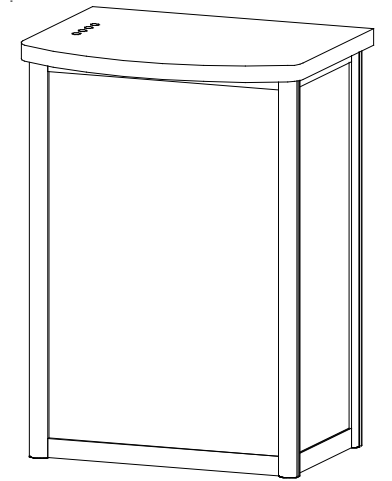

Completed Assembly

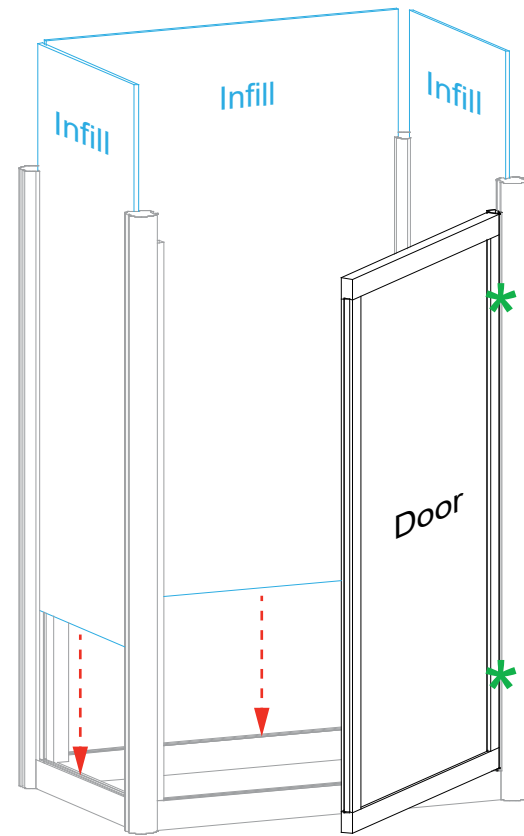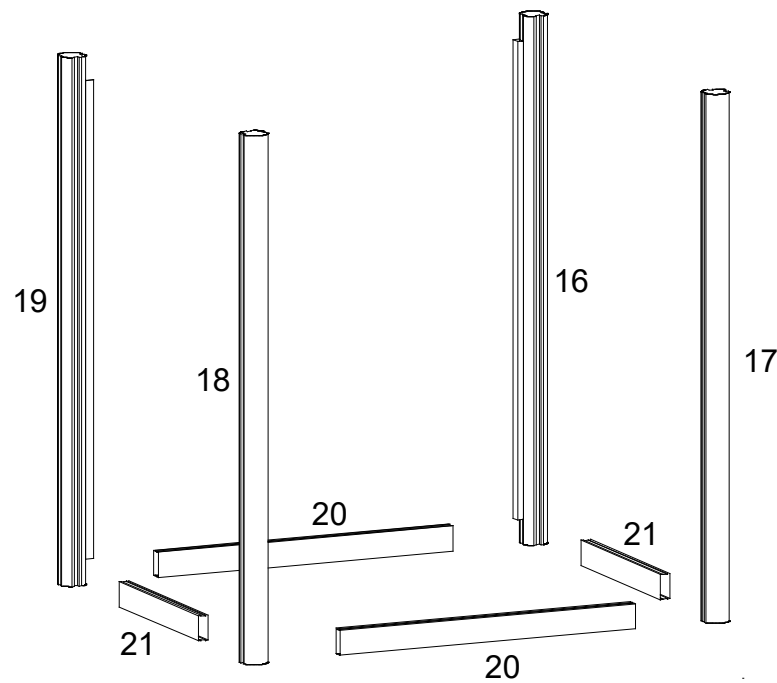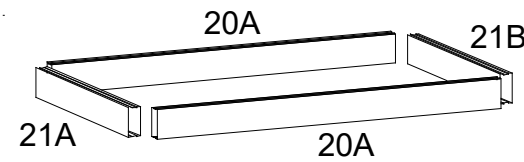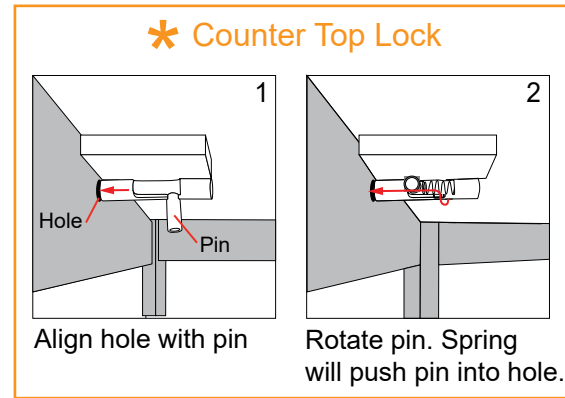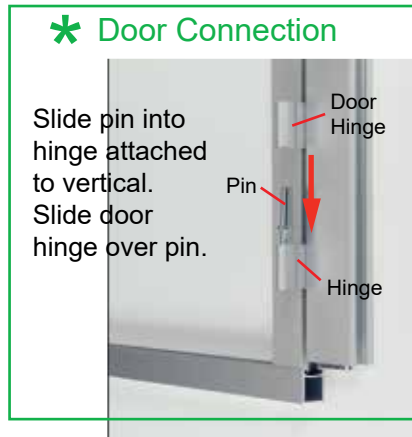

Keep door assembled, when packing.

